

SX- SMP-08T

CCTV SMPS : TERMINATOR SERIES

SX-SMP-08T

8 Channels

Protection

Engineered for reliability, it comes equipped with advanced safety features including overload, overvoltage, overcurrent, short circuit, and over-temperature protection — plus robust surge and lightning protection to ensure uninterrupted performance.

Key Features

100% Burn In Tested	Low Energy Consumption
Low Ripple Voltage	High Efficiency

Strong & Durable

Body Type : PC

Cable Type : 1 mtr PVC

100% Full Load Built In Test For Longlife & High Reliability

Certification

BIS Approved

Application

Connects 8 cctv cameras simultaneously



Built by Soltrix. Trusted Worldwide



SX- SMP-08T

CCTV SMPS : TERMINATOR SERIES

8 Channels



Built by Soltrix. Trusted Worldwide

Features	Specifications
AC Input Voltage	150- 265 Vac
DC Output Voltage	12-15 Vdc
Rated Power	72W
Ripple & Noise (mm.)	<200 mV(max)
Voltage Adj. Range	12-15V
Leakage Current	<2mA@230Vac
Device (frequency)	50-60Hz
Line Regulations	±2%
Load Regulations	±2%
SCP	Output short-circuit protection
OPP, OCP	Output overload/over-current protection
OVP	Output overvoltage protection, auto-restart or latching
line UV	Line Brown in/out Protection
OV	Line overvoltage shutdown extends line surge withstand
OTP	Accurate thermal shutdown, hysteretic or latching
Efficiency(Typ.)	>=84%
High Voltage Protection	3KvA
Storage Temperature	0-40°C
IP Protection	IP20
Surge	3KV
Safety Standard	IEC-60950-1-2005 IS-13252(PART-1):2010

SX- SMP-08T

CCTV SMPS : TERMINATOR SERIES

8 Channels



Built by Soltrix. Trusted Worldwide



Front View



Left Side View



Right Side View




Bottom View

SX- SMP-08T


CCTV SMPS : TERMINATOR SERIES

8 Channels


Product View

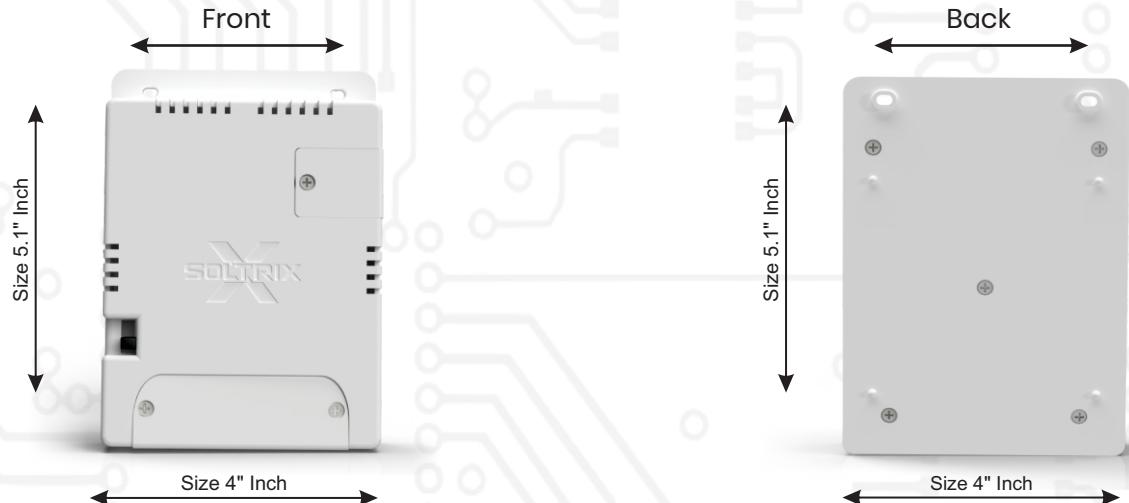

Packing View

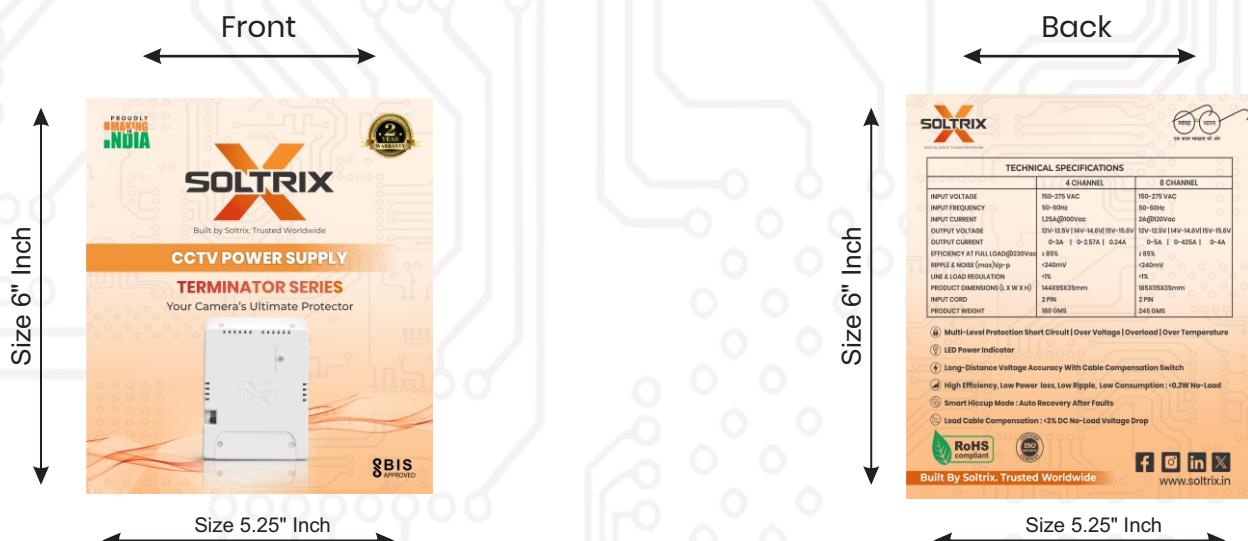

Master Box

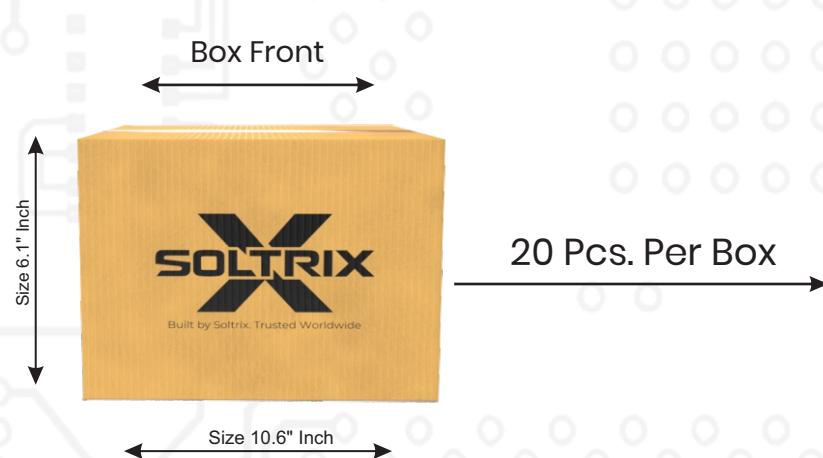

Applications:

8 Channels



Built by Soltrix. Trusted Worldwide

Ventilation For Better
Heat Dissipation

